



MOUNTING ON SEATPOST

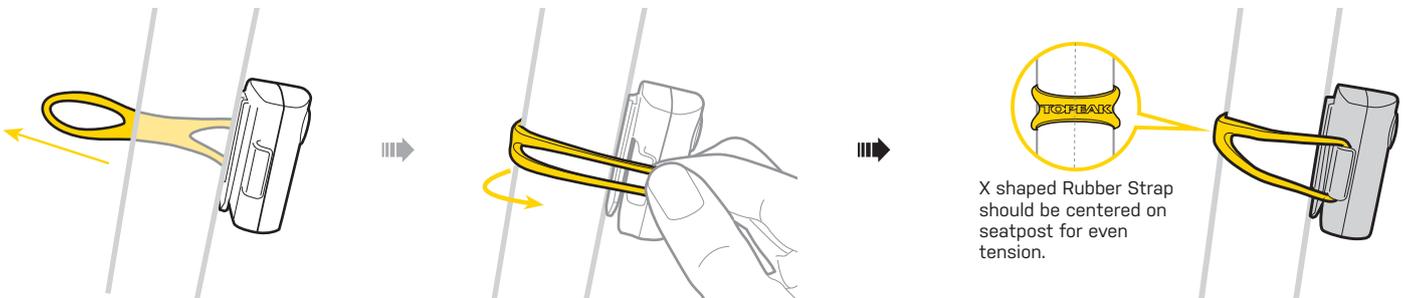


BATTERY CHARGING

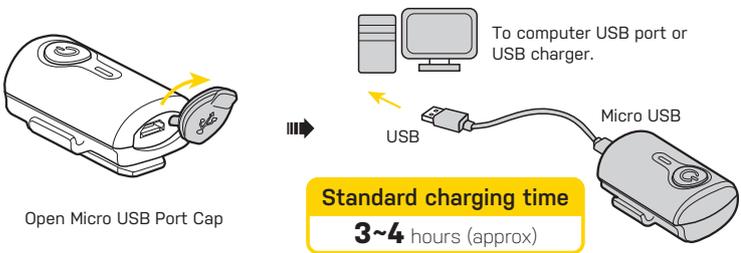

- The RedLite™ Mini USB **Charge Indicator** will be lit GREEN when charging. LED will turn off when battery is fully charged.
- The RedLite™ Mini USB **Charge Indicator** will be lit RED when the remaining battery power is low. Please charge the light as soon as possible.
- The RedLite™ Mini USB LED will not illuminate if the battery is faulty.
- Disconnect the Micro-USB cable from your computer port when the RedLite™ Mini USB is removed.
- After RedLite™ Mini USB is fully charged, unplug the USB cable.
- Do not open light body.
- Li-ion battery may take 3 to 5 charging cycles to attain full capacity.
- Do not leave battery connected to charge source over 48 hours continuously.
- Charging with USB hub will take longer.
- After long periods of non-use, the battery will lose charge. Always charge the battery fully before each use and storage.
- Maintain the battery by charging it every two months and storing it in a cool, dry place to prevent from decreasing its lifespan.
- Safely and properly dispose of the old Li-ion batteries according to your local regulations.

MOUNTING ON BAG

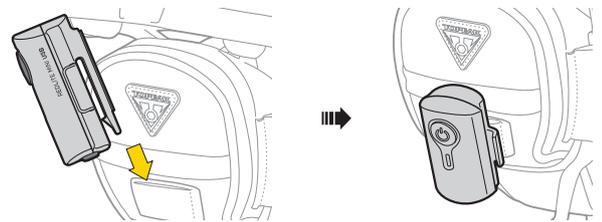

SPECIFICATION

Function : Blinking / 0.5W Constant / Blink Sequence
Burn Time : 6 hr / 2.5 hr / 15 hr
Luminous : 11 Lumens / 100 CD
Lamp : 3 super bright 0.2W red LEDs

Battery : 3.7V 330mAh Lithium Ion
Charge : USB power supply 5V 500mA
Weight : 22 g / 0.78 oz (light only)
Reserve Time: 0.5 hr

SPARE PARTS



WARNING

- Although light body is water-resistant (under normal weather conditions of rain, etc.) never intentionally submerge it underwater.

WARRANTY

1-year Warranty: All mechanical components against manufacturer defects only.
Warranty Claim Requirements
 To obtain warranty service, you must have your original sales receipt. Items returned without a sales receipt will assume that the warranty begins on the date of manufacture. All warranties will be void if the product is damaged due to user crash, abuse, system alteration, modification, or used in any way not intended as described in this manual.
 * The specifications and design are subject to change without notice.

Please contact your Topeak dealer with any questions.
 For USA customer service, call: 1-800-250-3068
www.topeak.com

